

WHAT'S INSIDE


- 1 Front Panel
- 2 Back Panel
- 3 Dimensions & Weight
- 4 Operating Specifications
- 5 Regulatory
- 6 Warranty
- 7 Model Options
- 8 Accessories

FRONT PANEL



- Power On/Off Button
- Integrated LCD - Configuration & Management
- 4 x 1Gbps Emulation Ports

REAR PANEL

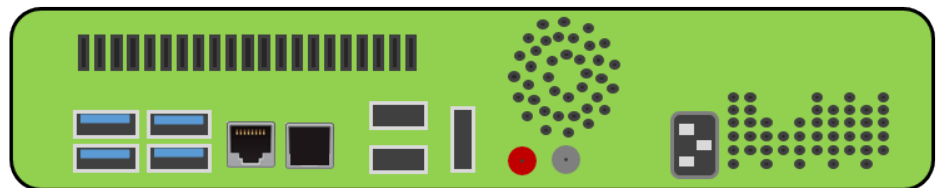

- Power Input Connect
- 1 x 1Gbps Management Port (MGMT)
- 1 x Display Port (Not Used)
- 1 X HDMI Port (Not Used)
- 4 x USB 3.0 (Not Used)
- 2 x Audio Jacks (Not Used)

DIMENSIONS & WEIGHT

Height:	77mm/3in
Width:	204mm/8in
Depth:	324mm/12.8in
Gross Weight:	5Kg/11lbs

OPERATING SPECIFICATIONS

Input Rated:	100-230 VAC, 50/60 Hz, 4-2A, Class I
Operating Temperature Range:	-5°C ~ 35°C
Non-Operating Temperature Range:	-40°C ~ 60°C
Operating Relative Humidity Range (non-condensing):	8% ~ 90%
180W high-efficiency power supply	

REGULATORY

- CE Mark
- FCC Declaration of Conformity
- Tested in accordance with UL60950-1 / CSA C22.2 No 60950-1
- CB Certificate #GB-TRAC 0536 covering National EU Group Differences, EU Special National Conditions, EU A-Deviations, CA, IL, KR, US
- Complies with:
 - UL60950-1
 - CSA C22.2 No 60950-1 Listing No E113044
- C MET US

WARRANTY

One (1) year from receipt, Return to Base.

A valid iTrinegy Service Agreement extends the warranty for the Service Agreement Term. iTrinegy Service also includes technical support, upgrades and certain enhancements.

NE-ONE DESKTOP MODELS

- NE-ONE Professional Model 5
- NE-ONE Professional Model 10
- NE-ONE Professional Model 20

The NE-ONE Professional Model 1 is only available as a virtual appliance. The NE-ONE Professional X-Series is delivered on a Half-Depth, Rack-Mount Appliance. Please see 'iTrinegy NE-ONE Professional | Technical Specifications Half-Rack Appliance' to see the technical specifications for the X-Series.

ACCESSORIES

Ruggedized Carry Case:

- Waterproof
- Corrosion-proof
- Crushproof
- Dustproof

Height:	192mm
Width:	485mm
Depth:	392mm
Net Weight:	3Kg
Gross Weight: (including NE-ONE Professional)	8Kg

